

Directions for Use

Famos Contact Label Gun

Reference: 15.300.250

Contents


1. General information
2. Setting the print
3. Insert of the label roll
4. Opening the front plate
5. Changing the carriage with ink rollers
6. Insert of new carriage complete with ink rollers
7. Closing front plate

1. General Information

The Famos Contact Label Gun is specially designed to be used with Famos Contact Double Labels for documentation and traceability purposes in CSSD.

This Contact Label Gun works very efficiently and it is very easy to use in terms of loading, carrying and printing. Below are the steps also shown in pictures you should follow to make your label gun ready for use.

2. Setting the print:

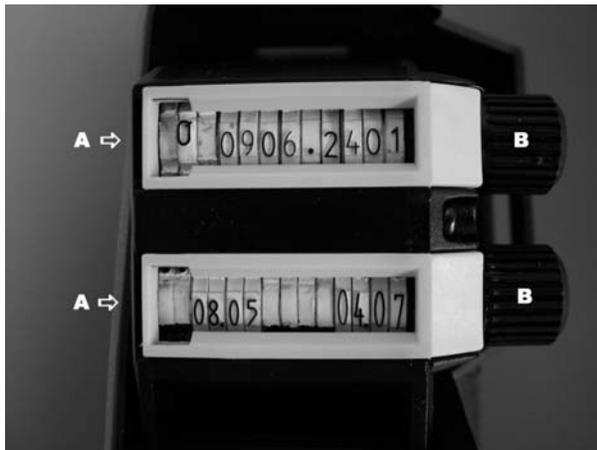


Pull adjustment knob (B) to the desired position and turn knob to select character to be printed. (A) The 14. position on print band is always vacant ! IMPORTANT: Adjustment knob must be pressed in before operating to avoid damage to the print head.

3. Insert of the label roll:



Press both stop pins (C) in direction of arrow to open bottom (D). Insert new label roll as shown on figure.

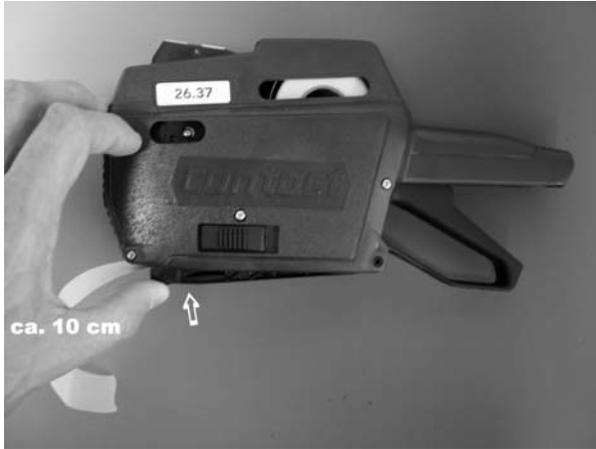

Please release 10 labels from the roll

Pull out the backing material approx. 10 cm and close bottom until it snaps.



Note that the backing material is place behind the two pins at the bottom-front (refer to arrows). In this way a correct printing is ensured.



Note that the backing material is place behind the two pins at the bottom-front (refer to arrows). In this way a correct printing is ensured.

4. Opening the front plate (F):




Put the index finger into rectangular bore at front plate (F), support with thumb on housing and open front plate with index finger.

5. Changing the carriage with ink rollers Duo (G):



Hold the knurled area of carriage (G) between thumb and index finger, spread the yellow swivel arm (H) until you can pull carriage with ink rollers out of the front (F).

6. Insert of new carriage complete with ink rollers (G):

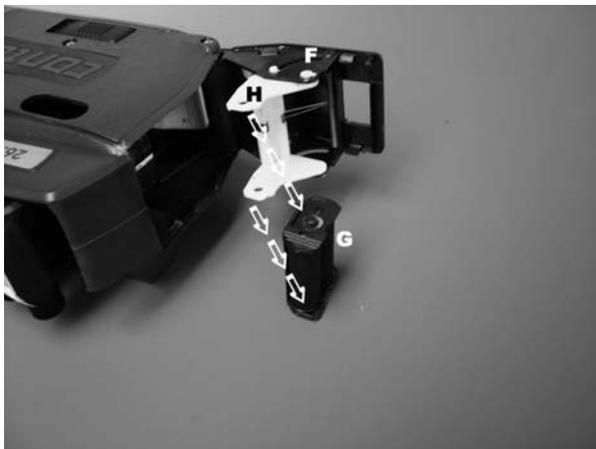

Hold front plate (F) and yellow swivel arm with one hand. Take carriage at knurled area with the other hand and make it horizontally snap in (see direction of arrow)

7. Closing front plate (F):



Press yellow swivel arm to the back and bottom (1) and close front plate tight (2)